

KEYENCE

NEW Autofocus 1D and 2D Code Reader

SR-1000 Series




EtherNet/IP™



SETTING THE NEW STANDARD FOR CODE READING

SR-1000 Series

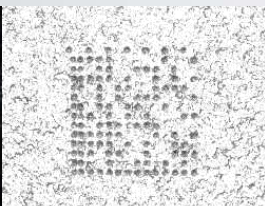

SR-1000 Series

3 CHALLENGES

CODE READERS FACE

1

READER CANNOT BE MOUNTED AT DESIRED DISTANCE

“Selecting the right reader and lens combination for the distance is frustrating.”

“The system has to be designed to fit the specifications of the reader.”

2

OPTIMAL SETTINGS ARE UNKNOWN

“Reading was successful during setup but there are many errors during actual operation.”

“Setup requires a whole day.”

3

READING FAILS DUE TO GLARE

“Do we need to mount the reader at a certain angle? What is the best angle?”

“Is external lighting required? What kind?”

1 ANSWER

JUST PRESS THE BUTTON



PRESS THE BUTTON

1

AUTOFOCUS

The reader can be mounted at any distance and maintain a clear image. (1000 mm max.)

2

AUTOMATIC TUNING

Determines optimal settings for exposure time, image processing filter, etc. [About 750000 combinations]

3

AUTOMATIC POLARIZATION

Glare can be eliminated. Reader angle adjustment or external lighting is unnecessary.




SETTING COMPLETE

Autofocus 1D and 2D code reader
SR-1000 Series



WORLD'S FIRST AUTOMATIC POLARIZATION CONTROL

The reader features both polarized and direct light sources. Automatic polarizing filter selection eliminates glare and allows flexible mounting.

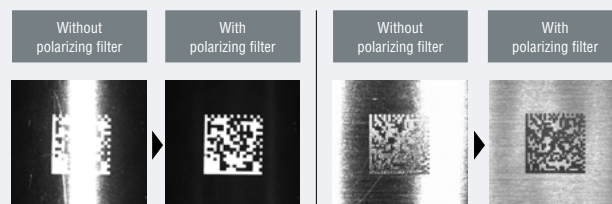

1

JUST PRESS THE BUTTON

AUTOFOCUS

ONE READER FOR MANY APPLICATIONS

Mounting is less restricted by performance or specifications of the code reader itself, thus improving flexibility in machine designs for production lines and jigs. With autofocus capabilities, a single reader can detect codes on targets of varying heights.

Detecting targets with differing heights


Securing a robot's movement range

Reading extremely small codes

FIELD OF VIEW 4× LARGER

Conventional field of view

Field of view of the SR-1000 Series

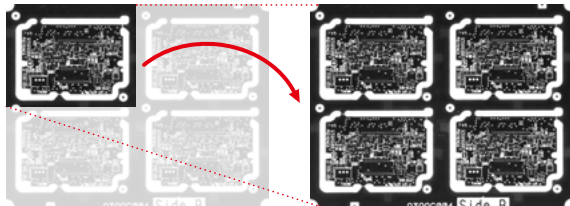

Range:
290 mm × 220 mm
11.42" × 8.66"

4× WIDER
than conventional models


EVEN IF THE POSITION

CHANGES



EVEN IF THE CODE IS

SMALL

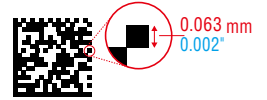

Distance:
110 mm
4.33"

Distance:
1000 mm
39.37"

1.6× LONGER
than conventional models

EVEN IF THE DISTANCE IS

FAR
















AUTOMATIC TUNING

OPTIMAL SETTING OF EXPOSURE TIME, FILTERS AND MORE

The code reader automatically optimizes the exposure time, image processing filter and other parameters according to the target and mounting distance.

CLEAR IMAGE CAPTURE


CORRECTION ITEMS AND EXAMPLES OF AFFECTED CODES

 Dark	CAPTURE BRIGHTNESS CORRECTION Automatically configures various combinations of exposure time, dynamic range and gain in order to achieve the optimal brightness.	 Black resin	 PCB
 Low contrast	CONTRAST THRESHOLD CORRECTION Automatically corrects black/white thresholds and optimizes the contrast between code and background.	 Metal	 Ceramic
 Thin printing	FILTER CORRECTION Automatically selects the best filter and filtering intensity to correct the captured image.	 Bleeding	 Thick printing
 Distortion	GEOMETRIC CORRECTION Corrects distorted codes, such as those on cylinders and other round surfaces or when the reader is mounted at an angle.	 Parallel distortion	 Trapezoidal distortion
 Stray dots	IMAGE REDUCTION & CORRECTION Reducing the image size may reduce background noise or missing spaces relatively smaller.	 Primary noise	 Dot printing

LATEST TECHNOLOGIES PROVIDING STABLE READING

HIGH-SPEED SEARCH


2D CODE SEARCH IN CAPTURED IMAGES

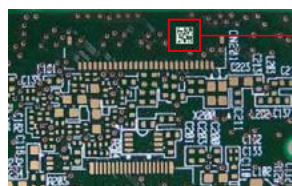

Binary processing enables immediate detection of 2D codes even if there is a code-like pattern in the field of view.

DEFECTIVE CODE POSITIONING PROGRAM

A newly developed defective code positioning program can identify four corners of a 2D code based on a similar code detection pattern, leading to a significant improvement in code detection performance.

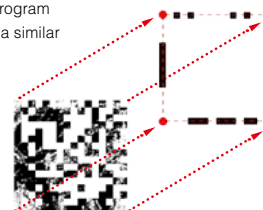


HIGH-LEVEL DECODING


CONTRAST ALGORITHM FOR LOCAL CONCENTRATION (CALC)

Our contrast algorithm for local concentrations divides a code into smaller pieces to perform binary processing using thresholds specified for each division. This enables accurate black/white classification without being affected by uneven print density.

CONVENTIONAL TECHNIQUE

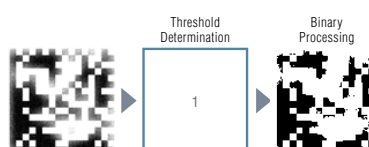

CALC TECHNIQUE

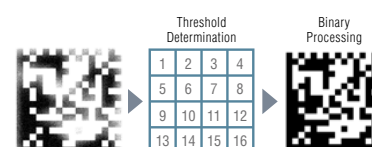


* The above illustration is only for reference and does not mean that a code is always divided into 16 parts.


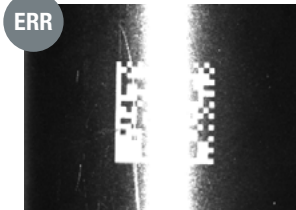
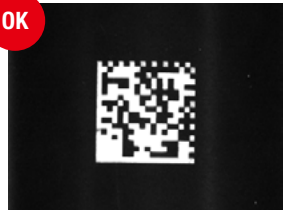

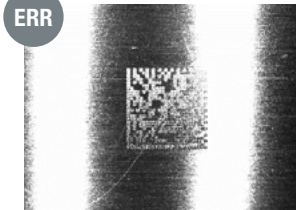



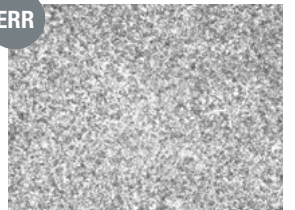
AUTOMATIC POLARIZATION CONTROL

ENSURING FLEXIBLE MOUNTING

Automatic polarization control function World's First

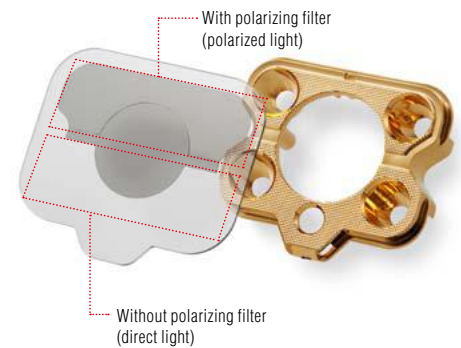The code reader automatically eliminates glare, thus eliminating the need for mounting angle adjustment or external lighting during installation. When combined with the autofocus function, mounting becomes highly flexible.



		Without polarizing filter	With polarizing filter
BLACK RESIN			
CYLINDER			
METAL			
HAIRLINE			
METAL			
DPM ON CAST SURFACE			


NEW OPTICAL DESIGN FOR STABLE READING

CPC (Compound Parabolic Concentrator) Illumination


A specially shaped reflector has been designed to create high efficiency illumination by reducing loss in light intensity from the high intensity LEDs. Gold plating maximizes the reflectance to achieve brightness exceeding conventional levels by 400%. This provides reading under bright, uniform illumination even at long ranges.



Conventional model

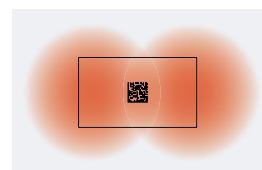

SR-1000

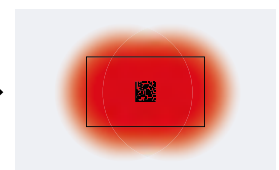

Light is concentrated efficiently within the field of view to provide high intensity illumination.

TWO MODES CAN BE SELECTED DEPENDING ON THE APPLICATION



UNAFFECTED BY CHANGING CONDITIONS

SMART MODE **NEW**


FOR CONSISTENT READING REGARDLESS OF CODE CONDITIONS



LIGHTER CODE

Fluctuations in code conditions are predicted during tuning and expanded reading settings are automatically generated. This ensures stable reading even when the contrast of the code changes, eliminating the need to reconfigure the code reader.

The reader predicts 43 patterns of change in printing conditions.

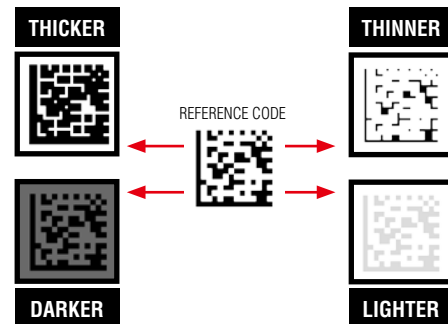

DETECTING CHANGES IN CODE CONDITIONS

CUSTOM MODE

FOR CODE QUALITY MANAGEMENT

The SR-1000 has the functionality to make judgments on code quality. Because code quality degradation can be detected before reading errors occur, this mode can be used for predictive maintenance of the printing process.

Matching level judgment function

Provides code quality comparison

Two codes, which both have a reading rate of 100%, can still be distinguished by the matching level



Reading rate **100%**
Matching level **75**



Reading rate **100%**
Matching level **43**

Code verification function

Verification based on code quality standards

OUTPUT DATA **AD-ERMT-55841:B**

TOTAL GRADE JUDGMENT

Judgment can also be given for each parameter

*This function is designed for 2D codes (QR, DataMatrix, GS1 Composite, PDF417).



SUPPORTED STANDARDS

- ISO/IEC 15415
- ISO/IEC TR 29158 (AIM DPM-1-2006)
- SAE AS9132
- SEMI T10-0701



EASY-TO-USE HIGH PERFORMANCE

ADVANCED SETUP SOFTWARE

AUTOID NETWORK NAVIGATOR **SR-H4W** NEW



The software provides not only easy code reader setup but also functionality to reduce man-hours for preliminary tests. It is now possible to connect to the software through USB. (SR-1000 Series only)

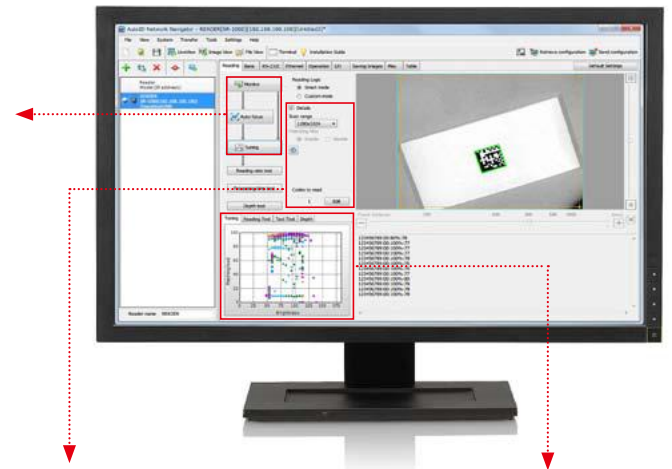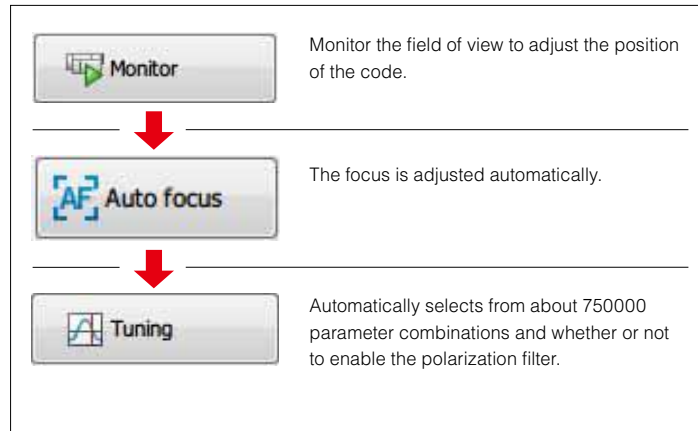

ADVANCED SETTINGS

☒ Details
Image capture range
1280x1024
Polarizing filter
☒ Enable ☐ Disable
Bank to Tune/Test
1
☒ Test with target bank
Codes to read
1 Edit

IMAGE CAPTURE RANGE
The smaller the range, the shorter the reading time becomes. Selectable from 800 × 600 mm 31.50" × 23.62", 1280 × 1024 mm 50.39" × 40.31", and user defined.

POLARIZATION FILTER
Selectable between enabled or disabled.

TARGET BANK (in custom mode only)
Specify the parameter bank number to modify.

TUNING HISTORY (in custom mode only)
Tuning history can be reviewed.


NO. OF CODES FOR READING
Specify the number of codes to read simultaneously.

TUNING MONITOR

The optimum settings are automatically determined from multiple combinations of image processing filters and brightness levels.

ETHERNET COMMUNICATION WIZARD NEW

Setup can be completed in just four steps with a question-answer form including visual explanations. In previous versions, the user needed to understand the settings available on the screen and determine which items required input. The new version uses a setup wizard to eliminate the need for item extraction, reducing man-hours for communication setup.

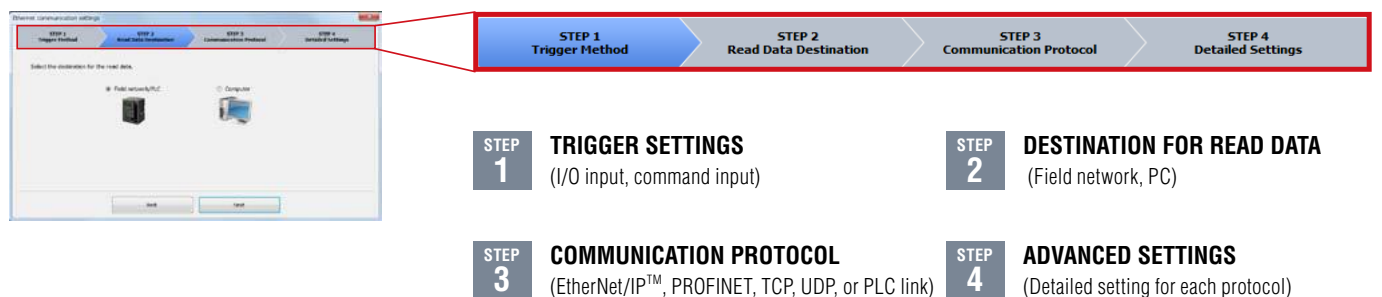

SOPHISTICATED MEASUREMENT MODES

The SR-1000 Series provides pre-verification prior to line operation based on tuning results as well as measurement of allowable line speed for reading codes at high speeds.

READING RATE MEASUREMENT

The reading success rate can be measured without conducting reading tests on multiple targets with the actual production line or equipment.

Tuning	Reading Test	Tact Test	Depth
Reading Test	100%		
Matching level	97		
Symbology	DataMatrix(12 x 12)		
Cell size	1.00mm		
Code size (width)	12.0mm		
PPC	25.0pixel/cell		
Read Data	123456789		


READING TACT MEASUREMENT


The reading cycle time (tact) can be determined without conducting reading tests on multiple targets with the actual production line or equipment.

Tuning	Reading Test	Tact Test	Depth
Read time	32ms		
Max time	33ms		
Min time	32ms		
Read Data	123456789		


READING DEPTH MEASUREMENT NEW

The depth of field can be determined from the mounting distance and the code used for tuning, without conducting reading tests on targets with the actual production line or equipment.
(When the mounting distance changes, perform re-tuning to enable reading again.)

Tuning	Reading Test	Tact Test	Depth
			
Installation distance	175mm		
Reading depth	110mm		
Near depth	- 55mm		
Far depth	+ 55mm		

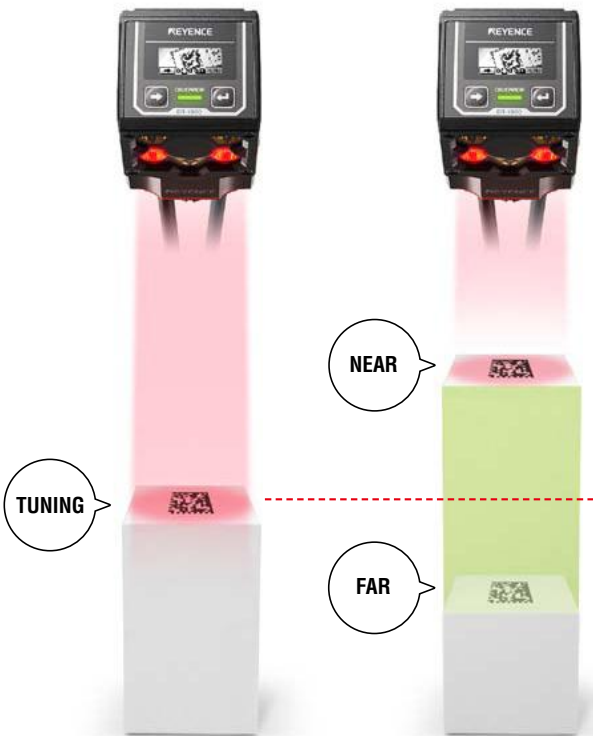

LINE SPEED MEASUREMENT NEW

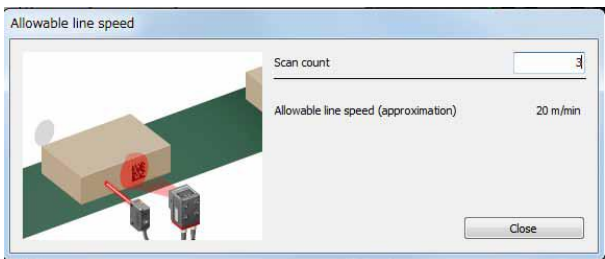


You can check allowable line speed before installation. This helps reduce man-hours spent adjusting production line designs or jigs.

FIRST-IN-ITS-CLASS, BUILT-IN ORGANIC LED (OLED) DISPLAY


CHECK OPERATION ON-SITE WITHOUT A PC

There is no need for a personal computer or monitor in the facility. The code position adjustment and operating condition can be checked simply with the intuitive built-in display.

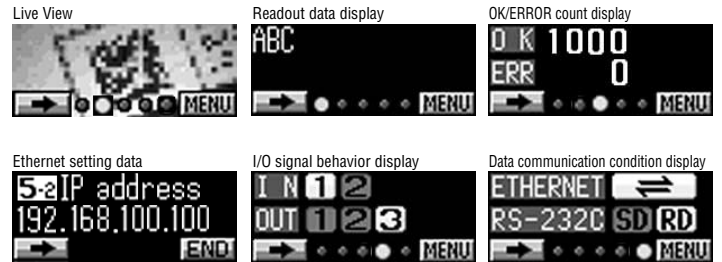

EASY SETUP WITHOUT A PC

You can set the optimal reading parameters after adjusting the code position by simply pressing the ENTER button to complete fully automatic tuning.

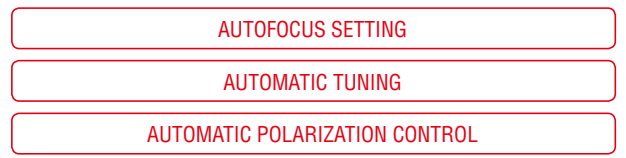



Reading test starts automatically.

HIGHLY-ADVANCED FUNCTIONS OFFER SIMPLE OPERATION

MASTER/SLAVE FUNCTION FOR USING MULTIPLE READERS EFFICIENTLY

This function reduces the programming load on the host computer drastically when multiple readers are used. Two modes are available: multi-drop link mode and multi-head mode.


* SR-D100/750 Series units can also be included in the connection.

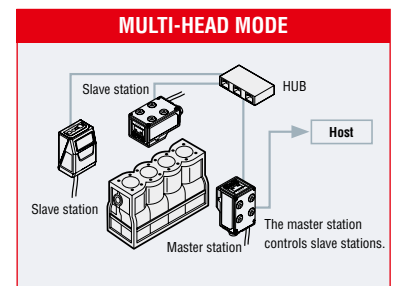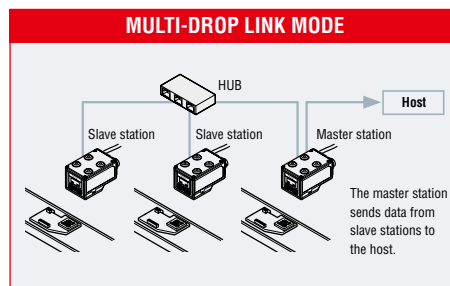

AUTOMATIC SELECTION OF OPTIMAL READING CONDITIONS (PARAMETER BANK FUNCTION)


CUSTOM MODE ONLY

The reader will automatically alternate between registered parameter banks until the proper reading conditions are determined.

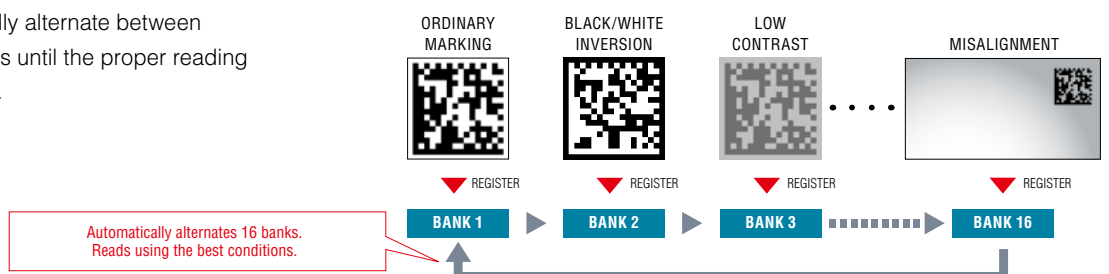

SYSTEM CONFIGURATION DIAGRAM

SR-1000 Series

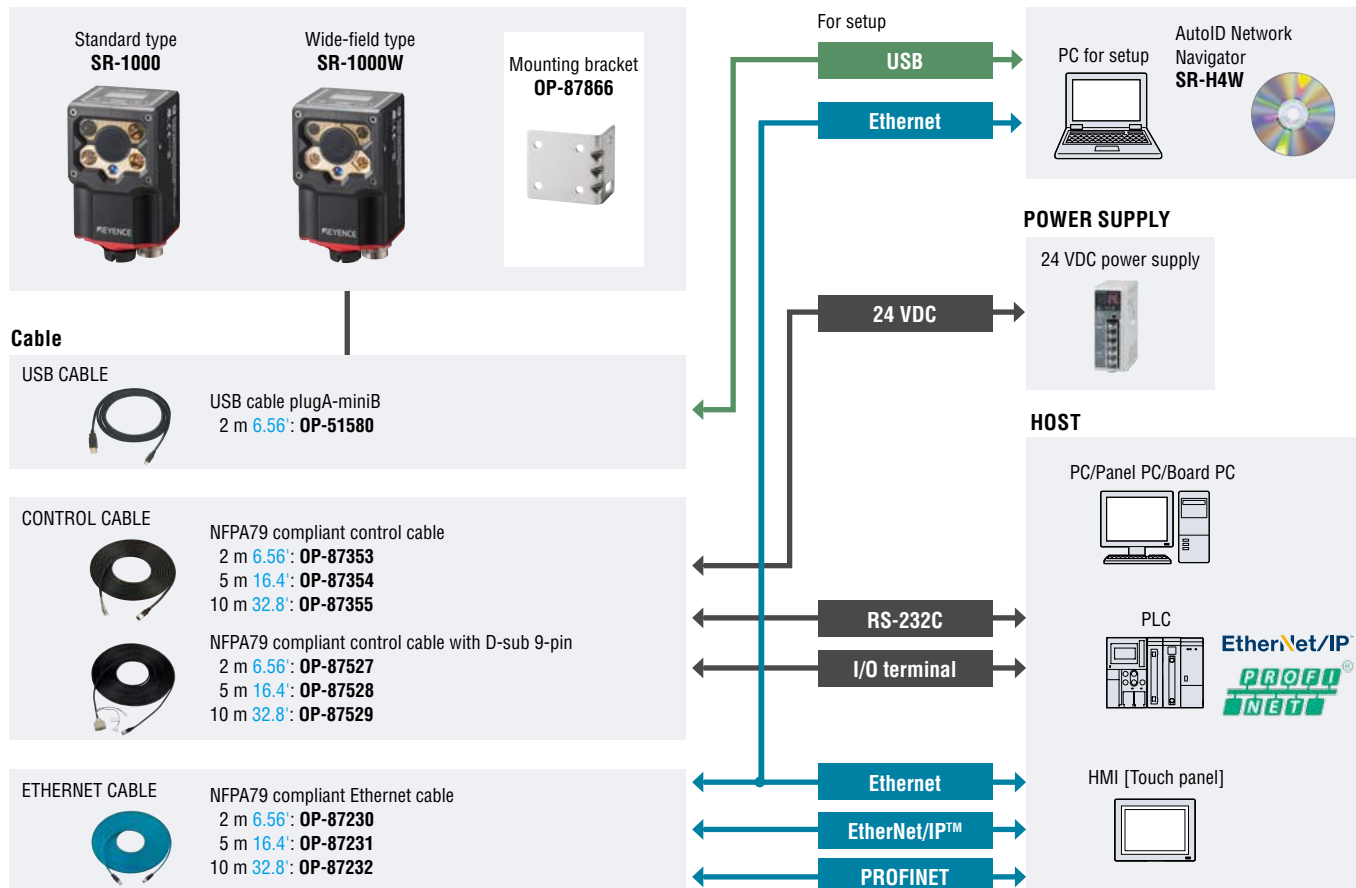

READING RANGE CHARACTERISTICS [TYPICAL]


SR-1000

MINIMUM RESOLUTION

Distance	Unit (mm inch)	
	2D	Barcode
110 4.33"	0.063 0.002"	0.082 0.003"
110 to 140 4.33" to 5.51"	0.082 0.003"	
110 to 230 4.33" to 9.06"	0.14 0.006"	
110 to 300 4.33" to 11.81"	0.18 0.007"	0.11 0.004"
110 to 400 4.33" to 15.75"	0.24 0.009"	0.15 0.006"
110 to 600 4.33" to 23.62"	0.37 0.015"	0.22 0.009"
110 to 1000 4.33" to 39.37"	0.61 0.024"	0.37 0.015"

FIELD OF VIEW

Distance	Image capture range (1280 × 1024 50.39" × 40.31")		Image capture range (800 × 600 31.50" × 23.62")	
	Width	Height	Width	Height
110 4.33"	30 1.18"	24 0.94"	19 0.75"	14 0.55"
140 5.51"	40 1.57"	32 1.26"	25 0.98"	18 0.71"
230 9.06"	68 2.68"	54 2.13"	42 1.65"	32 1.26"
300 11.81"	90 3.54"	72 2.83"	56 2.20"	42 1.65"
400 15.75"	122 4.80"	97 3.82"	76 2.99"	57 2.24"
600 23.62"	185 7.28"	148 5.83"	116 4.57"	87 3.43"
1000 39.37"	312 12.28"	250 9.84"	195 7.68"	146 5.75"

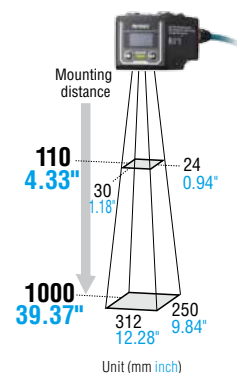


SR-1000W

MINIMUM RESOLUTION

Distance	Unit (mm inch)	
	2D	Barcode
50 1.97"	0.082 0.003"	0.082 0.003"
50 to 100 1.97" to 3.94"	0.14 0.006"	
50 to 150 1.97" to 5.91"	0.20 0.008"	
50 to 230 1.97" to 9.06"	0.30 0.012"	0.18 0.007"
50 to 300 1.97" to 11.81"	0.38 0.015"	0.23 0.009"
50 to 400 1.97" to 15.75"	0.51 0.020"	0.31 0.012"
50 to 600 1.97" to 23.62"	0.76 0.030"	0.45 0.018"

FIELD OF VIEW

Distance	Image capture range (1280 × 1024 50.39" × 40.31")		Image capture range (800 × 600 31.50" × 23.62")	
	Width	Height	Width	Height
50 1.97"	35 1.38"	28 1.10"	22 0.87"	16 0.63"
100 3.94"	67 2.64"	54 2.13"	42 1.65"	31 1.22"
150 5.91"	99 3.90"	79 3.11"	62 2.44"	46 1.81"
230 9.06"	150 5.91"	120 4.72"	93 3.66"	70 2.76"
300 11.81"	194 7.64"	155 6.10"	121 4.76"	91 3.58"
400 15.75"	257 10.12"	206 8.11"	161 6.34"	120 4.72"
600 23.62"	384 15.12"	307 12.09"	240 9.45"	180 7.09"

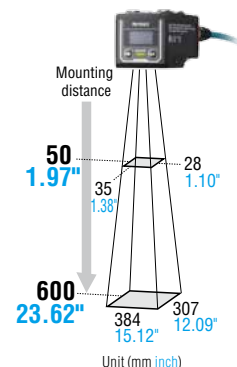

SPECIFICATIONS



Main unit

Model			SR-1000		SR-1000W	
Type			Standard type		Wide-field type	
Receiver	Sensor		CMOS Image Sensor			
	Number of pixels		1280 × 1024 pixels		1280 × 1024 pixels	
Light emitter	Illumination light source		High intensity red LED			
	Pointer light source		High intensity green LED			
Focus adjustment			Autofocus*			
Reading specifications	Supported symbol	2D	QR, MicroQR, DataMatrix (ECC200), GS1 DataMatrix, PDF417, Micro PDF417, GS1 Composite (CC-A, CC-B, CC-C)			
		Barcode	GS1 DataBar, CODE39, CODE39 Full ASCII, ITF, NW-7 (Codabar), CODE128, 2of5(Industrial 2of5), COOP 2of5 GS1-128, JAN/EAN/UPC, Trioptic CODE39, CODE93, Pharmacode			
	Minimum resolution	2D	0.063 mm 0.002"		0.082 mm 0.003"	
		Barcode	0.082 mm 0.003"		0.082 mm 0.003"	
	Reading distance		110 mm to 1000 mm 4.33" to 39.37"		50 mm to 600 mm 1.97" to 23.62"	
	Field of view for reading (Typical example at 400 mm)		122 × 97 mm 4.80" × 3.82"		257 × 206 mm 10.12" × 8.11"	
I/O specifications	Control input	Number of inputs	2			
		Input type	Bidirectional voltage input			
		Maximum rating	26.4 VDC			
		Minimum ON voltage	15 VDC			
		Maximum OFF current	0.2 mA or less			
	Control output	Number of outputs	3			
		Output type	Photo MOS relay output			
		Maximum rating	30 VDC			
		Maximum load current	1 output: 50 mA or less, Total of 3 outputs: 100 mA or less			
		Leakage current when OFF	0.1 mA or less			
		Residual voltage when ON	1 V or less			
	Ethernet	Communication standard	IEEE 802.3 compliant, 10BASE-T/100BASE-TX			
		Supported protocol	TCP/IP, SNMP, FTP, BOOTP, MC Protocol, Omron PLC link, KV STUDIO, EtherNet/IP™, PROFINET			
	Serial communication	Communication standard	RS-232C compliant			
		Transmission speed	9600, 19200, 38400, 57600, 115200 bps			
Supported protocol		No-protocol, MC Protocol, SYSWAY, KV STUDIO				
USB	Communication standard	USB 2.0 Full Speed compliant				
Environmental resistance	Enclosure rating		IP65			
	Ambient temperature		0 to +45°C 32 to 113°F			
	Ambient storage temperature		-10 to +50°C 14 to 122°F			
	Relative humidity		35 to 85% RH (No condensation)			
	Storage ambient humidity		35 to 85% RH (No condensation)			
	Ambient luminance		Sunlight: 10000 lux, Incandescent lamp: 6000 lux, Fluorescent lamp: 2000 lux			
	Operating environment		No dust or corrosive gas present			
	Vibration		10 to 55 Hz Double amplitude 0.75 mm 0.030", 3 hours each in X, Y and Z directions			
Rating	Power voltage		24 VDC ±10%			
	Current consumption		Approx. 700 mA			
Weight			Approx. 200 g			

* The focal position can be adjusted automatically during installation.

Setup software



Model	SR-H4W
Supported OS	Microsoft Windows 8 Professional or later 32bit/64bit (Except for Windows RT) Microsoft Windows 7 Professional or later 32bit/64bit Microsoft Windows VISTA Business/Ultimate SP2 or later 32bit
Running environment*	•RAM: System memory 1 GB or more (2 GB or more for 64 bit OS) •Screen resolution: 1024 × 768 or more

* .NET Framework 3.5 SP1 or above has been installed.


DIMENSIONS

Unit: mm inch

Main unit SR-1000/1000W

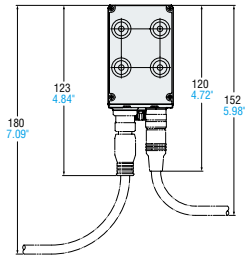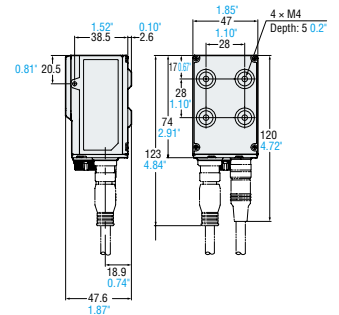

When the mounting bracket (OP-87866) is used

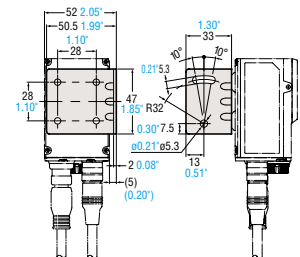

CALL
TOLL
FREE

TO CONTACT YOUR LOCAL OFFICE
1-888-KEYENCE
1 - 8 8 8 - 5 3 9 - 3 6 2 3

www.keyence.com



SAFETY INFORMATION

Please read the instruction manual carefully in order to safely operate any KEYENCE product.

KEYENCE CORPORATION OF AMERICA

Corporate Office 669 River Drive, Suite 302, Elmwood Park, NJ 07407 **PHONE:** 888-539-3623 **FAX:** 855-539-0123 **E-mail:** keyence@keyence.com

Sales & Marketing Head Office 1100 North Arlington Heights Road, Suite 210, Itasca, IL 60143 **PHONE:** 888-539-3623 **FAX:** 855-539-0123

AL Birmingham	CO Denver	IN Indianapolis	MI Detroit	NJ Elmwood Park	OH Cincinnati	PA Pittsburgh	TX Austin	WI Milwaukee
AR Little Rock	FL Tampa	KS Kansas City	NY Rochester	NY Rochester	OH Cleveland	SC Greenville	TX Dallas	
CA N. California	GA Atlanta	KY Louisville	MN Minneapolis	NC Charlotte	OR Portland	TN Knoxville	VA Richmond	
CA Los Angeles	IL Chicago	MA Boston	MO St. Louis	NC Raleigh	PA Philadelphia	TN Nashville	WA Seattle	

KEYENCE CANADA INC.

Head Office **PHONE:** 905-366-7655 **FAX:** 905-366-1122 **E-mail:** keyencecanada@keyence.com
Montreal **PHONE:** 514-694-4740 **FAX:** 514-694-3206 **Windsor** **PHONE:** 905-366-7655 **FAX:** 905-366-1122

KEYENCE MEXICO S.A. DE C.V.

PHONE: +52-81-8220-7900 **FAX:** +52-81-8220-9097
E-mail: keyencemexico@keyence.com

KA1-1124

The information in this publication is based on KEYENCE's internal research/evaluation at the time of release and is subject to change without notice.
Copyright (c) 2014 KEYENCE CORPORATION. All rights reserved.

SR1000-KA-C-US 1114-2 [611929] Printed in Japan

